Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Jameco Part Number 202921



Dimensions (In.)

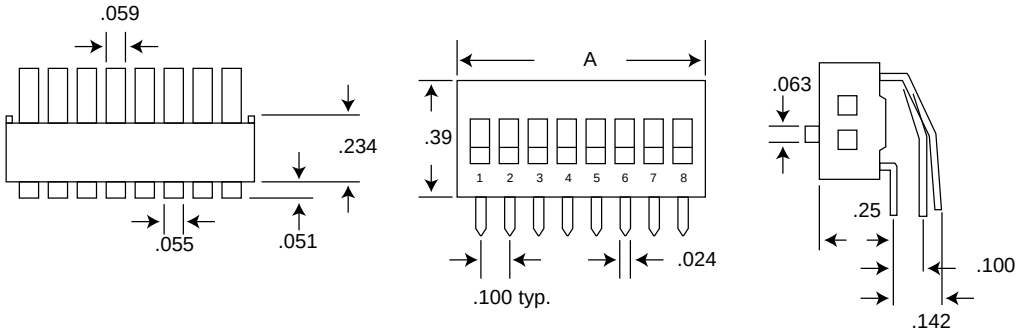

Specifications:

- Mechanical life: 10,000 operation min. per switch
- Electrical life: 5,000 operation min. per switch
- Operation force: less than 800g
- Non-switching rating: 100mA, 50VDC
- Switching: 50mA, 24VDC
- Circuit: single pole, single throw

Recommended Soldering and Cleaning Processes:

- Keep all switch contacts in their "OFF" position for all operations
- Wave soldering: recommended solder temperature at 500°F (260°C) max. 5 seconds
- Hand soldering: use a soldering iron of 30 watts or less, controlled at 608°F (320°C) approximately 2 seconds while applying solder
- Cleaning process: flux clean using force rinse, high agitation or triple bath cleaning method Freon TF or TE give excellent results. When vapor methods are used, do not subject the switch to solvents at temperatures above 125°F (51°C).

	No. of Positions	Dimension "A" (In.)	Circuit
	4	.439	SPST
	8	.839	SPST